


**Pevnostní (strukturovaný)  
trhací nýt RIVLOCK**  
Hlava OCEL/Zinek Bílý  
TRN OCEL/Zinek Bílý



DIN:  
ČSN:  
ISO:

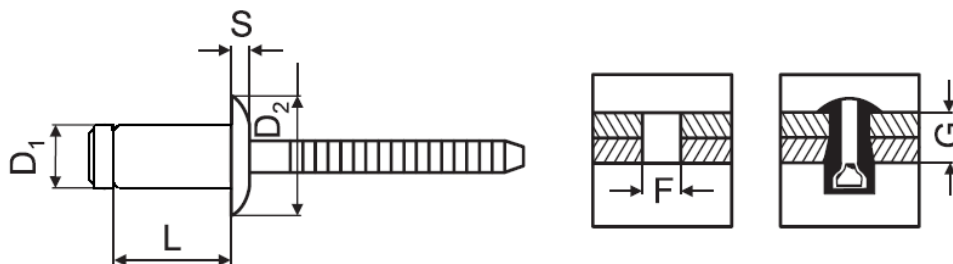

D1: 5,0 D2: 9,8	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na stříh	Kód Fastek
S: 2,2mm F: 5,0mm	4,8x9,0	1,5-3,5	3500N	3920N	9NPL4809SS
	4,8x11,5	3,5-6,0			9NPL4811SS
	4,8x14,0	6,0-8,5			9NPL4814SS
	4,8x16,5	8,5-11,0			9NPL4816SS

D1: 6,4 D2: 13,6	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na stříh	Kód Fastek
S: 3,3mm F: 6,7mm	6,4x10,5	2,8-4,8	6470N	11180N	9NPL6410SS
	6,4x12,5	4,8-6,8			9NPL6412SS
	6,4x14,5	6,8-8,8			9NPL6414SS
	6,4x16,5	8,8-10,8			9NPL6416SS
	6,4x18,5	10,8-12,8			9NPL6418SS
	6,4x20,5	12,8-14,8			9NPL6420SS