


Trhací nýt s plochou hlavou
 Hlava ALUMINIUM 2,5% Mg
 TRN ALUMINIUM 5,0% Mg



DIN: 7337A
 ČSN: 02 2391
 ISO:

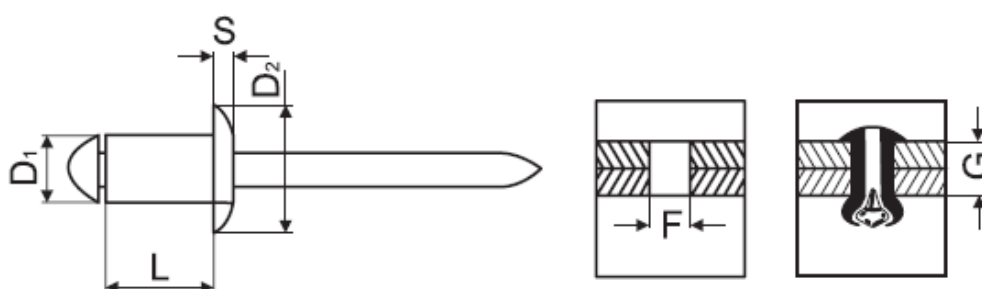

D1: 3,2mm D2: 6,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 0,8mm F: 3,3mm	3,2x6	1,5-3,5	670N	535N	9NPS3206AA
	3,2x8	3,5-5,0			9NPS3208AA
	3,2x10	5,0-7,0			9NPS3210AA
	3,2x12	7,0-8,5			9NPS3212AA
	3,2x14	8,5-10,5			9NPS3214AA
	3,2x16	10,5-13,0			9NPS3216AA

D1: 4,0mm D2: 8,0mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,0mm F: 4,1mm	4,0x6	1,5-3,5	1025N	845N	9NPS4006AA
	4,0x8	3,0-5,0			9NPS4008AA
	4,0x10	5,0-6,5			9NPS4010AA
	4,0x12	6,5-8,5			9NPS4012AA
	4,0x14	8,5-10,5			9NPS4014AA
	4,0x16	10,5-12,5			9NPS4016AA
	4,0x18	12,5-14,5			9NPS4018AA
	4,0x20	14,5-16,5			9NPS4020AA

D1: 4,8mm D2: 9,5mm	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,1mm F: 4,9mm	4,8x8	3,0-4,5	1420N	1150N	9NPS4808AA
	4,8x10	4,5-6,0			9NPS4810AA
	4,8x12	6,0-7,5			9NPS4812AA
	4,8x14	7,5-9,0			9NPS4814AA
	4,8x16	9,0-11,5			9NPS4816AA
	4,8x18	11,5-13,0			9NPS4818AA
	4,8x20	13,0-15,0			9NPS4820AA
	4,8x25	15,0-20,0			9NPS4825AA
	4,8x30	20,0-25,0			9NPS4830AA
	4,8x35	25,0-30,0			9NPS4835AA