

Pevnostní (strukturovaný) trhací nýt

CUPLOCK s plochou hlavou

Hlava INOX A2


TRN INOX A2



DIN:

ČSN:

ISO:

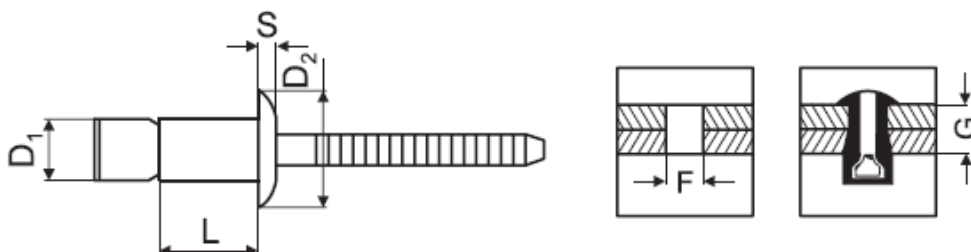

D1: 4,8 D2: 10,0	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 2,2mm	4,8x10,0	1,6-6,9	4200N	5800N	9NPC4810II
F: 4,9mm	4,8x14,0	1,6-11,0			9NPC4814II

D1: 6,4 D2: 13,5	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 3,0mm	6,4x14,0	2,0-9,5	8000N	10500N	9NPC6414II
F: 6,6mm	6,4x20,0	2,0-15,9			9NPC6420II