


**Trhací nýt MULTIGRIP (vícesvěrný)  
s plochou hlavou**  
Hlava ALUMINIUM 3,5% Mg  
TRN OCEL/Zinek Bílý



DIN:  
ČSN:  
ISO:

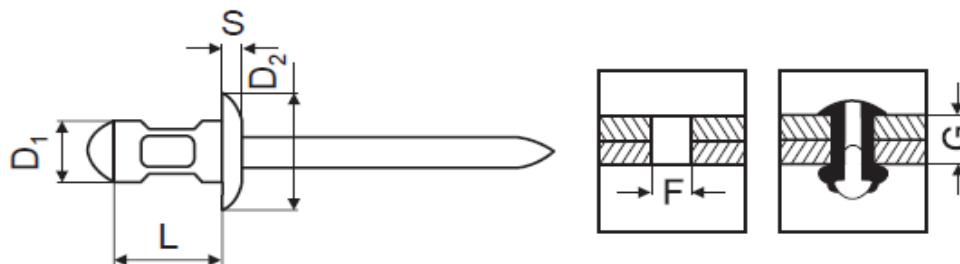

D1: 3,0 D2: 6,0	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na stříh	Kód Fastek
S: 1,4mm F: 3,1mm	3,0x6	1,0-4,0	650N	520N	9NPM3006AS
	3,0x8	1,0-5,5			9NPM3008AS
	3,0x10	2,5-7,0			9NPM3010AS
	3,0x12	4,5-9,0			9NPM3012AS

D1: 3,2 D2: 6,0	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na stříh	Kód Fastek
S: 1,4mm F: 3,3mm	3,2x6	1,0-4,0	980N	680N	9NPM3206AS
	3,2x8	1,0-5,0			9NPM3208AS
	3,2x10	2,5-7,0			9NPM3210AS
	3,2x12	4,5-9,0			9NPM3212AS
	3,2x14	6,5-11,0			9NPM3214AS
	3,2x16	8,5-13,5			9NPM3216AS

D1: 4,0 D2: 8,0	D1xL	G Svěrná tl.	Pevnost v tahu	Pevnost na stříh	Kód Fastek
S: 1,7mm F: 4,1mm	4,0x6	1,0-3,5	1600N	1150N	9NPM4006AS
	4,0x8	1,0-5,0			9NPM4008AS
	4,0x10	1,5-6,5			9NPM4010AS
	4,0x12	3,5-8,5			9NPM4012AS
	4,0x14	5,5-10,5			9NPM4014AS

<b>D1: 4,0 D2: 8,0</b>	<b>D1xL</b>	<b>G Svěrná tl.</b>	<b>Pevnost v tahu</b>	<b>Pevnost na střih</b>	<b>Kód Fastek</b>
<b>S: 1,7mm F: 4,1mm</b>	4,0x16	6,0-12,5	1600N	1150N	9NPM4016AS
	4,0x18	9,5-14,5			9NPM4018AS
	4,0x20	11,5-16,5			9NPM4020AS

<b>D1: 4,8 D2: 9,5</b>	<b>D1xL</b>	<b>G Svěrná tl.</b>	<b>Pevnost v tahu</b>	<b>Pevnost na střih</b>	<b>Kód Fastek</b>
<b>S: 2,0mm F: 4,9mm</b>	4,8x10	1,0-6,0	2350N	1500N	9NPM4810AS
	4,8x12	2,0-8,0			9NPM4812AS
	4,8x14	4,0-10,0			9NPM4814AS
	4,8x16	6,0-12,5			9NPM4816AS
	4,8x18	8,0-14,0			9NPM4818AS
	4,8x20	10,0-16,0			9NPM4820AS
	4,8x22	12,0-18,0			9NPM4822AS
	4,8x25	12,5-20,0			9NPM4825AS
	4,8x27	17,0-23,0			9NPM4827AS
	4,8x30	20,0-25,0			9NPM4830AS