


Trhací nýt s velkou plochou hlavou
 Hlava OCEL/Zinek Bílý
 TRN OCEL/Zinek Bílý



DIN:
 ČSN:
 ISO:

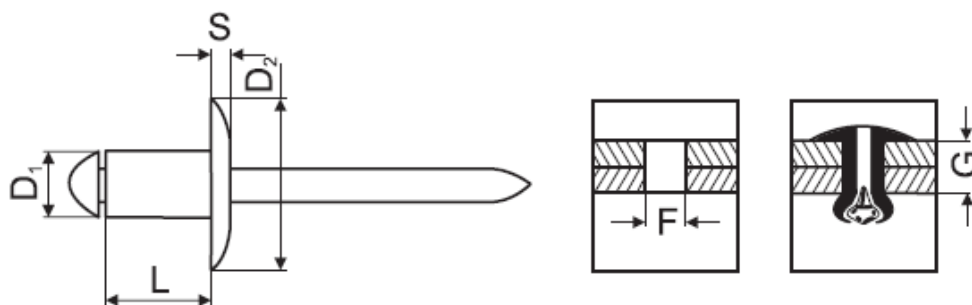

D1: 3,2mm D2: 9,5mm	D1xLxD2	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,4mm F: 3,3mm	3,2x8x9,5	3,5-5,5	1285N	1100N	9NV32089SS
	3,2x10x9,5	5,5-7,5			9NV32109SS
	3,2x12x9,5	7,5-9,5			9NV32129SS
	3,2x14x9,5	9,0-11,0			9NV32149SS

D1: 4,0mm D2: 12,0mm	D1xLxD2	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,6mm F: 4,1mm	4,0x8x12	2,0-4,0	2200N	1700N	9NV40082SS
	4,0x10x12	4,0-6,0			9NV40102SS
	4,0x12x12	6,0-8,0			9NV40122SS
	4,0x14x12	8,0-10,0			9NV40142SS
	4,0x16x12	10,0-12,0			9NV40162SS

D1: 4,8mm D2: 14,0mm	D1xLxD2	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 1,8mm F: 4,9mm	4,8x10x14	3,5-5,5	3100N	2900N	9NV48104SS
	4,8x12x14	5,5-7,5			9NV48124SS
	4,8x14x14	7,5-9,5			9NV48144SS
	4,8x16x14	9,0-11,0			9NV48164SS
	4,8x18x14	11,0-13,0			9NV48184SS
	4,8x20x14	13,0-15,0			9NV48204SS
	4,8x22x14	15,0-17,0			9NV48224SS

D1: 4,8mm D2: 16,0mm	D1xLxD2	G Svěrná tl.	Pevnost v tahu	Pevnost na střih	Kód Fastek
S: 2,0mm F: 4,9mm	4,8x10x16	3,5-6,0	2920N	2300N	9NV48106SS
	4,8x12x16	6,0-8,0			9NV48126SS
	4,8x14x16	8,0-10,0			9NV48146SS
	4,8x16x16	10,0-12,0			9NV48166SS
	4,8x18x16	12,0-14,0			9NV48186SS
	4,8x20x16	14,0-16,0			9NV48206SS
	4,8x22x16	16,0-18,0			9NV48226SS